




THE EUROTAINER T14 TYPE

450, 1100 and 2500 LITRE SMALL PORTABLE TANKS

For the Transport and Storage of Liquid Products

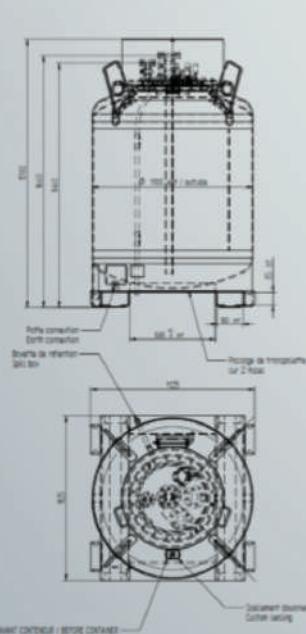

- / Global approvals
- / Low tare weight
- / Handling with forklift
- / Safety devices including rupture disc and pressure relief valve
- / Worldwide availability
- / Stainless steel barrel
- / Multiple specification options

THE EUROTAINER T14 TYPE 450, 1100 and 2500 LITRE SMALL PORTABLE TANKS

STANDARD SPECIFICATIONS*

Capacity	450 litre / 118 US gallon 1100 litre/ 290 US gallon 2500 litre/ 660 US gallon	Top Discharge	40 mm / 1.5 inch 316 stainless steel ball valve fitted to a 40 mm/1.5 inch siphon tube via bolted flange
T Code	T14, UN Portable Tank	Bursting disc	Fitted under safety relief valve. Teflon gasket, 65 mm diameter set at 4.84 bar
Internal Diameter	450L: 1090 mm 1100L: 1090 mm 2500L: 1590 mm	Earth connection / grounding	One (1) stainless steel lug
Length:	450L: 1125 mm 1100L: 1125 mm 2500L: 1640 mm	Manway	Stainless steel, 500 mm / 20 inches diameter, stud bolt M20/85 mm closures. PTFE gasket.
Width	450L: 1125 mm 1100L: 1125 mm 2500L: 1630 mm	Air Line	20 mm / 0.75 inch stainless steel ball valve
Height	450L: 1080 mm 1100L: 1780 mm 2500L: 2074 mm	Filling Port	Two (2) fitted / 50 mm diameter
Material	316Ti stainless steel	Spill boxes	Fitted with protection cover
Maximum Gross Weight	450L: 4300 kg 1100L: 4300 kg 2500L: 5500 kg	Safety Devices	65 mm/2.5 inch pressure high flow relief valve set at 4.4 bar / 64 psi.
Tare Weight	450 L: 436 kg 1100L: 530 kg 2500L: 845 kg	Bottom discharge	None
Working Pressure	4 bar/ 58 psi	Manometer	Temperature readings in C and F
Test Pressure	6 bar/ 87 psi	Design Code	ASME sect. VIII, div. 1
Design Temp	93 C	Provisional openings	2 x DN 50 (50 mm) provisions
Barrel thickness and construction	6 mm equivalent reference steel, 316Ti stainless steel construction		

* All specification details are based on the T14 type small portable tank in the Eurotainer fleet. Specifications may vary based on a selected tank container. For more specific details please contact your local Eurotainer office. Our full office list can be found on our website at www.eurotainer.com.

Approvals: All global approvals for international transport as UN Portable tank including, IMDG, RID/ADR, US DOT/CFR 49, UIC and other approvals.

Specification Options:

Lining/coating, level gauges, GPS tracking and telemetry systems, lined/coated valves, various valve connections and fittings, steam heating coils, insulation, electric heating, air actuated valves and dry couplings, etc.

GO TO WWW.EUROTAINER.COM FOR MORE INFORMATION



Part of
STREEM

